

ades
automatic data entry and
identification systems




CM-880

↑ SLIM CCD
BARCODE SCANNER



2 IN 1 BARCODE SCANNER FOR BARCODE SCANNING AND NOTE TESTING.

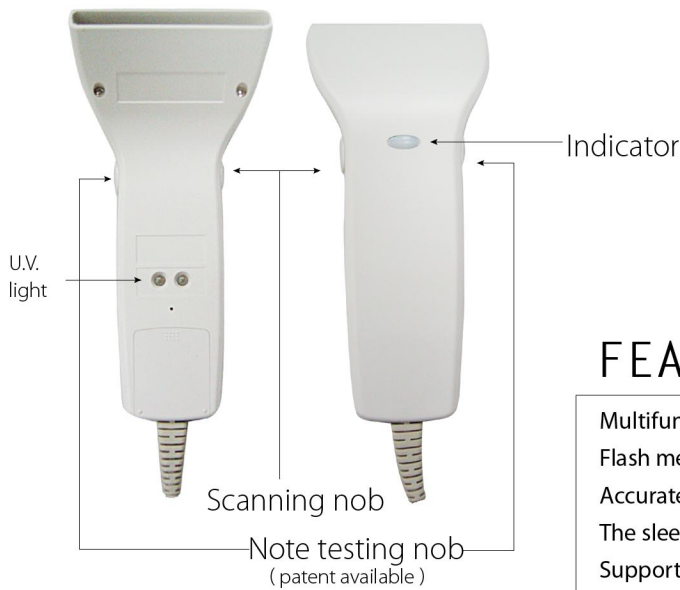

NOTE TESTING



BARCODE SCANNING



FEATURES :

- Multifunctional barcode operation and bank note authentication. (Patent available)
- Flash memory for easily updating software and downloading configuration.
- Accurate barcode read rate from contact to 50mm.
- The sleek and lightweight design is in an easy-to-use hand-held ergonomic form factor.
- Support Plug & Play keyboard interface to allow connection of Notebook directly.

SPECIFICATION :

Model No.	CM-880
Output Interface	PS2 USB RS232C
Read Barcode Format	EAN-8 EAN-13 UPC-A Code-32 UPC-E EAN/UPC Add-on Code-39 Code-11 UCC/EAN/Code-128 Industrial-25 Interleaved-25 Martix-25 China Post-25 Codabar/Nw7 MSI/Plessey
Resolution	Min. 0.127 mm (5mil)
PCS	Up to 0.45
Window width	80mm
Read barcode size	110mm
Depth of Field	0~50mm (0.39 15.6mil PSC=0.9)
Light Source	Red LED lamp 630nm
Read Sensor	CCD linear image sensor
Scanning Rate	100 scans/sec
Read Indicator	Red LED and Adjustable-volume-Buzzer
Programming Configuration	by user manual or download via RS232C
Cable	2m straight type
weight	95g (without cable)
Drop Durability	1m drop onto concrete surface
Working Temp.	0 ~ 50 degree C
Working Humidity	10~90% RH
Storage Temp.	-10~60 degree C
Storage Humidity	5~95% RH
RFI/EMI	FCC class A & CE
Voltage	DC 5V + - 5%
Working power	40~45mA
Stand by power	20uA (0.02mA)
Remark	Interface cables are interchangeable. Plug & Play USB barcode reader works on Windows98? Windos2000? Windows XP? Macintosh? Linux and any other system with USB keyboard support.

CM-880 READING DEPTH AND READING ANGLE :

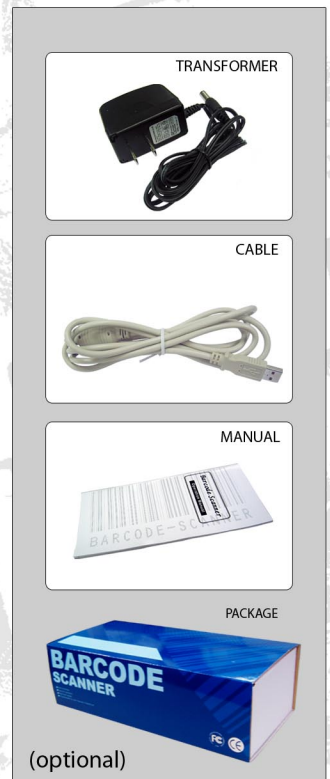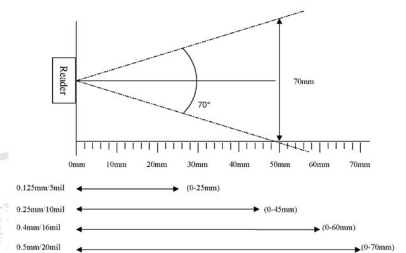

HOW TO CHANGE CABLE :



7F, No. 183, Section1, Tatung Road, Hsi Chih 221
 , Taipei Hsien, Taiwan, R.O.C.
 Http://www.canmax.com.tw E-mail:canmax@ms9.hinet.net
 Tel: +886-2-2647-7797 Fax: +886-2-2647-7798

