



## **IMAGETEAM<sup>™</sup> 3900i Kit Series** *USB Interface Fixed Position Linear Imager in Apple<sup>®</sup> iMac<sup>™</sup> Colors*

Hand Held Products offers multiple color scanners to complement the Apple<sup>®</sup> iMac<sup>™</sup>. The IMAGETEAM<sup>™</sup>(IT) 3900i is a fixed position linear imager that adds bar code scanning to kiosks and other OEM applications. The IT3900i uses linear imaging technology to deliver a bright, sharp aiming line, and fast reading and decoding that makes scanning intuitive and simple.

Bar code scanning at a kiosk is typically done by someone without scanning experience. The scan line must be easy to see. The scanner must read quickly, without perfect orientation, and read a wide variety of bar code labels. Since the bar code is presented to the scanner, the scanner must have a large working range. The IT3900i does all this and more. The IT3900i has an automatic trigger mode for constant scanning, or can be used in a presentation mode, where the scanner turns on when a bar code is placed in its viewing area. Scanning can also be controlled by the host computer via serial commands.

The IT3900i connects to the Apple iMac via the USB port. The IT3900i comes in two kit versions: the 3900i-12F in frost, and the blueberry 3900i-12B. Kits include a USB cable.

### *Features & Benefits*

#### **Translucent Plastic Housing**

*Complements iMac computers and provides a sharp, modern look.*

#### **USB Interface**

*Compatible with iMac and other USB compliant PCs.*

#### **Bright, Sharp and Focused Aiming Line**

*Easy scanning by inexperienced users in any lighting condition.*

#### **100,000 Mean Time Between Failures and 5 Year Warranty**

*Long, reliable in-service life.*

#### **Powerful, Flexible Architecture**

*Connects and interfaces to all major PCs and Apple<sup>®</sup> computers. Windows<sup>®</sup>-based programming tools provided for easy setup and configuration.*

#### **Real World Reading Performance**

*Reads faded labels, short quiet zones, dot matrix printing, and printer-induced bar space variations.*

# IMAGETEAM™ 3900i Kit Series

## Performance

<b>Illumination:</b>	630 NM Visible Red LED
<b>Receiving Device:</b>	3648 element linear imager
<b>Reading Distance:</b>	From 1 in. (2.5 cm) to 9 in. (22.8 cm) on medium density codes
<b>Reading Width:</b>	5 in. (12.7 cm) code width at 7 in. (17.8 cm) distance
<b>Resolution:</b>	5 mil. at 3.5 in. (8.8 cm) distance
<b>Skew Angle:</b>	±30°
<b>Pitch Angle:</b>	±15°
<b>Horizontal Velocity:</b>	2 in. (5.1 cm) per second
Minimum Reflectance	
<b>Difference:</b>	30%
<b>Scan Rate:</b>	Programmable to 270 scans per second
<b>Decode Rate:</b>	270 decodes per second

Mechanical/Electrical

## Dimensions

<b>Length:</b>	4.7 in. (11.9 cm)
<b>Height</b>	1.5 in. (3.8 cm)
<b>Width:</b>	3.1 in. (7.9 cm)
Weight:	
<b>Housing:</b>	Polycarbonate/ABS blend, UL 940VO
<b>Power Requirements:</b>	5Vdc ± 10% at scanner


<b>Current Draw:</b>	<u>Scanning</u>	<u>Standby</u>
<b>@270 s/s</b>	275mA	125mA
<b>@67 s/s</b>	150mA	125mA

Power Supply

<b>Noise Rejection:</b>	Maximum 100mV peak to peak, 10 to 100 kHz
<b>Triggering:</b>	Continuous autotrigger mode, or via serial command
<b>Mounting:</b>	Three M-4 threaded inserts

## Environmental

<b>Temperature</b>	
<b>Operating:</b>	+32°F to +122°F (0°C to +50°C)
<b>Storage:</b>	-40°F to 140°F (-36°C to +60°C)
<b>Humidity:</b>	0 to 95%
<b>Mechanical Shock:</b>	Operational after 25 drops from 5 ft. (1.53 m) to concrete
<b>Ambient Illumination:</b>	0 - 100,000 lux
<b>ESD Protection:</b>	Functional after 15kV discharge
<b>Vibration:</b>	Withstands 5G peak from 20 to 300 Hz
<b>Agency:</b>	FCC Class B, CE EMC Class B, CE Low Voltage Directive, EN60825-1 LED Safety: Class 1, UL, cUL listed, TÜV
<b>MTBF:</b>	per MIL-HDBK-217F Ground Benign exceeds 100,000 hours
<b>Symbologies:</b>	Codabar, Code 3 of 9 including PARAF, Interleaved 2 of 5, Code 2 of 5, Matrix 2 of 5, Code 11, Code 128, UPC, EAN/JAN, China Postal Code.
<b>Interfaces:</b>	All popular PCs and terminals via keyboard wedge, keyboard replacement/direct connect, Apple ADB, iMac, USB, TTL level RS-232, wand emulation mode, and includes (HHLC) non decoded laser compatible output.
<b>Warranty:</b>	Five year factory warranty.

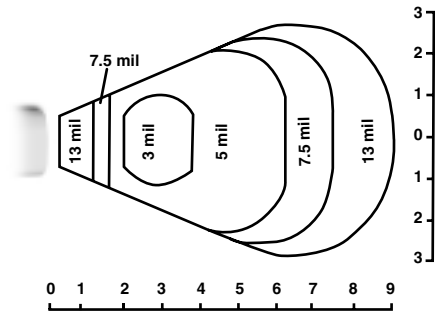

Typical reading zones on good quality bar codes

IMAGETEAM is a registered trademark of Welch Allyn Data Collection, Inc.

iMac is a trademark of Apple Computer, Inc.

Apple is a registered trademark of Apple Computer, Inc.

Windows is a registered trademark of Microsoft, Inc.

## Worldwide Offices

### Offices Serving North America

Skaneateles Falls, NY  
Tel: (315) 685-8945  
Fax: (315) 685-3172  
Charlotte, NC  
Tel: (704) 537-1444  
Fax: (704) 532-4191

### Offices Serving Europe, Middle East, and Africa

Europe  
Tel: Int +31 (0) 40 24 24 486  
Fax: Int +31 (0) 40 24 25 672  
United Kingdom  
Tel: Int +44 (0) 1 925 240055  
Fax: Int +44 (0) 1 925 631280  
France  
Tel: Int +33 (0) 1 461 04111  
Fax: Int +33 (0) 1 461 04120

### Germany

Tel: Int +49 (0) 7 477 151377  
Fax: Int +49 (0) 7 477 151378

### Offices Serving Asia and the Pacific Rim

Hong Kong  
Tel: Int +852 2511 3050/2511 3132  
Fax: Int +852 2511 3557

### Japan

Tel: Int +813 52127392  
Fax: Int +813 32617372

### Offices Serving Latin America

Naples, Florida  
Tel: (941) 263-7600  
Fax: (941) 263-9689

Web Site Address [www.handheld.com](http://www.handheld.com)

Welch Allyn Data Collection, Inc. and Hand Held Products, Inc. ("Hand Held Products") ©1999-2000, Hand Held Products. All rights reserved. Printed in the U.S.A.  
Due to Hand Held Products' continuing product improvement programs, specifications and features herein are subject to change without notice.